



Model # B6WBRC4-4S


# HARDWARE



5/16" x 1"  
Machine Bolt



5/16" Washer



5/16" Washer

# PRODUCT SPECIFICATIONS

## **B6WBRC4-4S SINGLE SIDED INGROUND BENCH WITH BACK**

Seat & Back: 2" x 2" x 1/8" formed angle frame with 1-1/2" radius corners. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: The main post is fabricated from 4 x 4 x 11 gauge square tubing. 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing seat support. Seat arms are supported by a 1/4" thick, 6" gusset. Tube ends are pre-galvanized steel capped. Seat and back mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.

Dimensions: 6' bench inground with back. Seat and back are 10" wide x 72" long. Seat height is 18". Seat back height is 34-1/16". Total depth of seat with back is 24".


# COMPONENTS

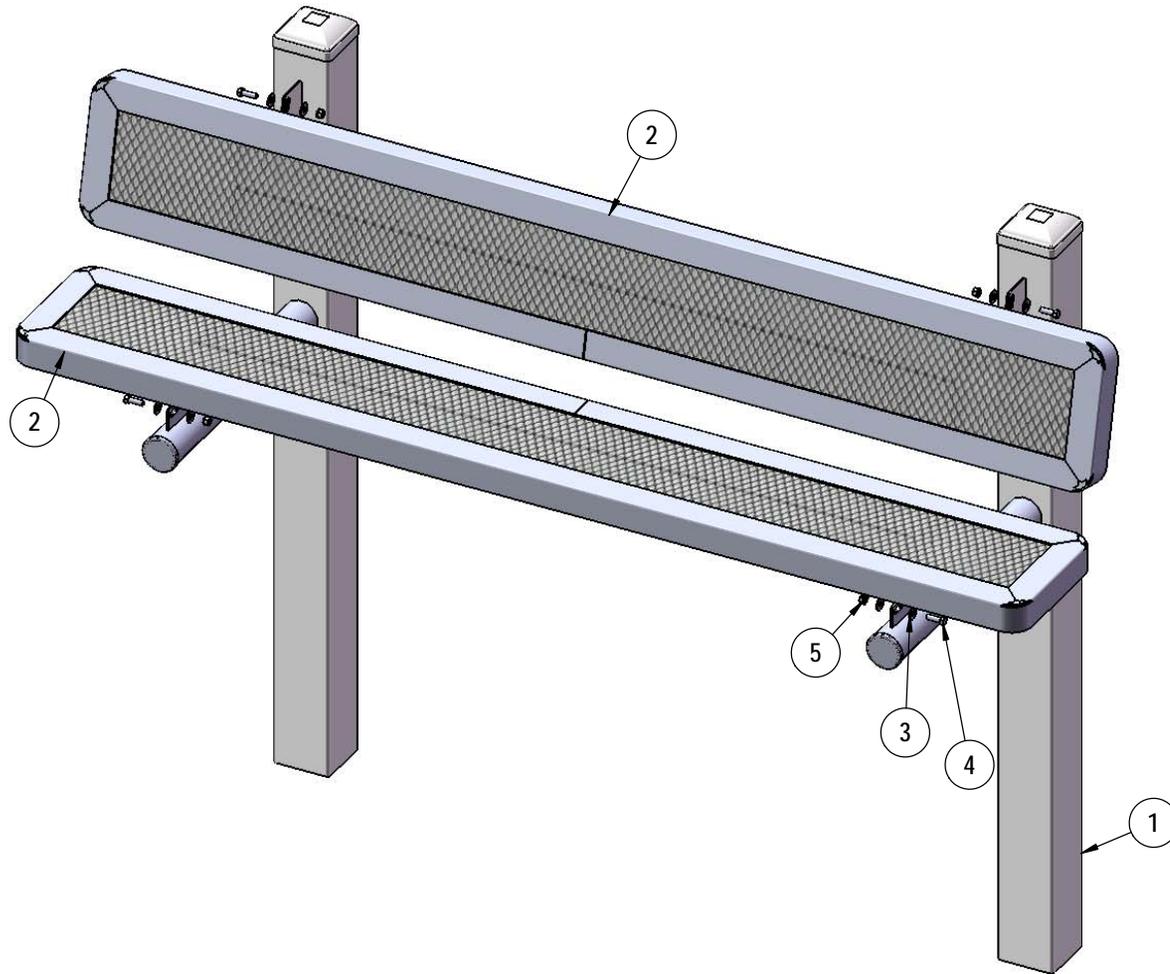

ITEM NO.	PartNo	DESCRIPTION	QTY
1	P-V961S	961 Vinyl Inground Leg	2
2	RC72-S	6' long x 10" wide regal expanded seat	2
3	33-02-0007	5/16" SS Washer	16
4	33-05-0029	5/16" x 1" Machine Bolt (SS)	8
5	33-03-0012	5/16" Kep Nut (SS)	8


**Superior**<sup>®</sup>  
 RECREATIONAL PRODUCTS  
 A PLAYCORE Company

## STEP 1

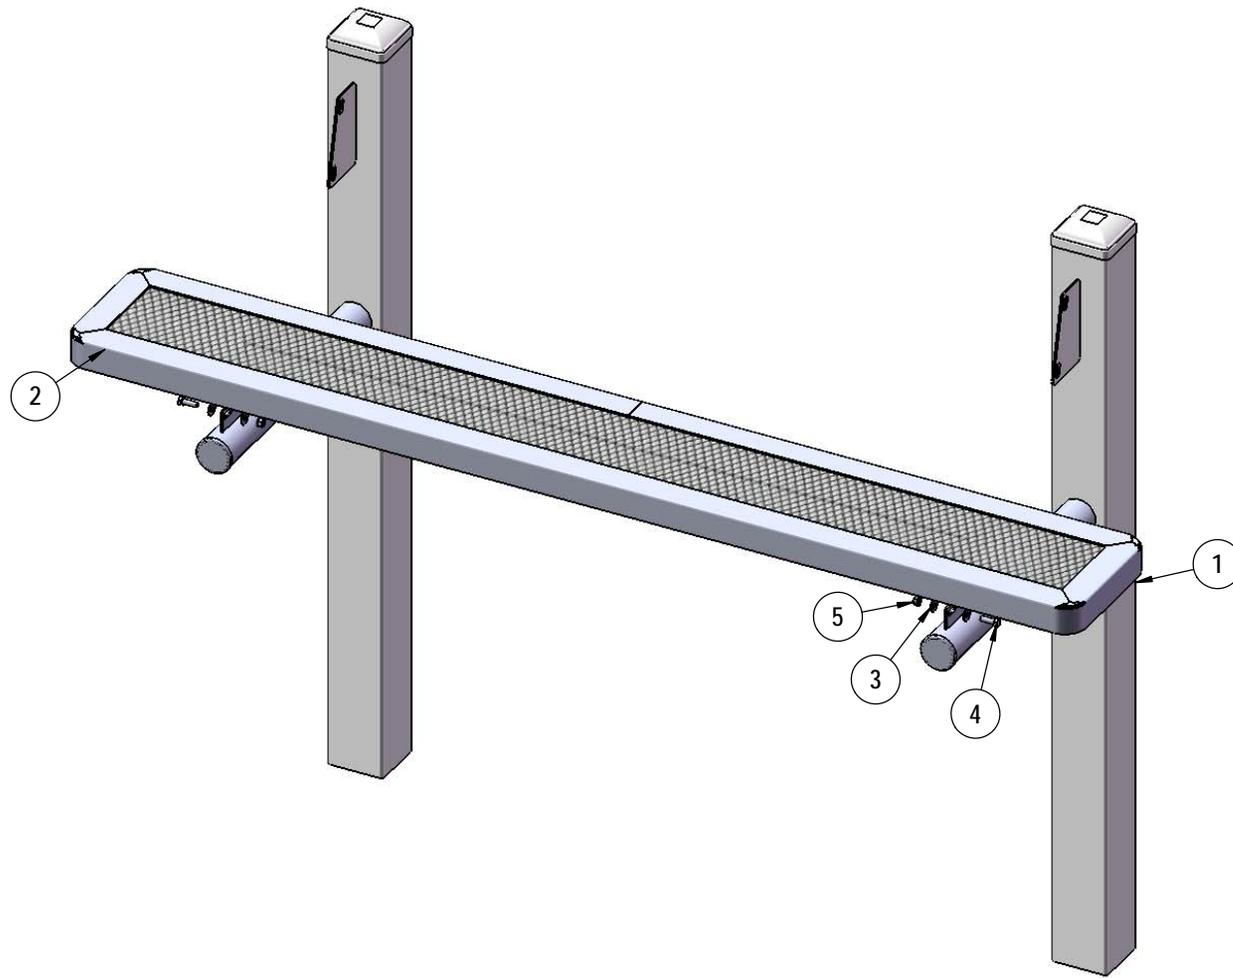


Attach the 6' Seat to the Legs using specified hardware.

## STEP 2

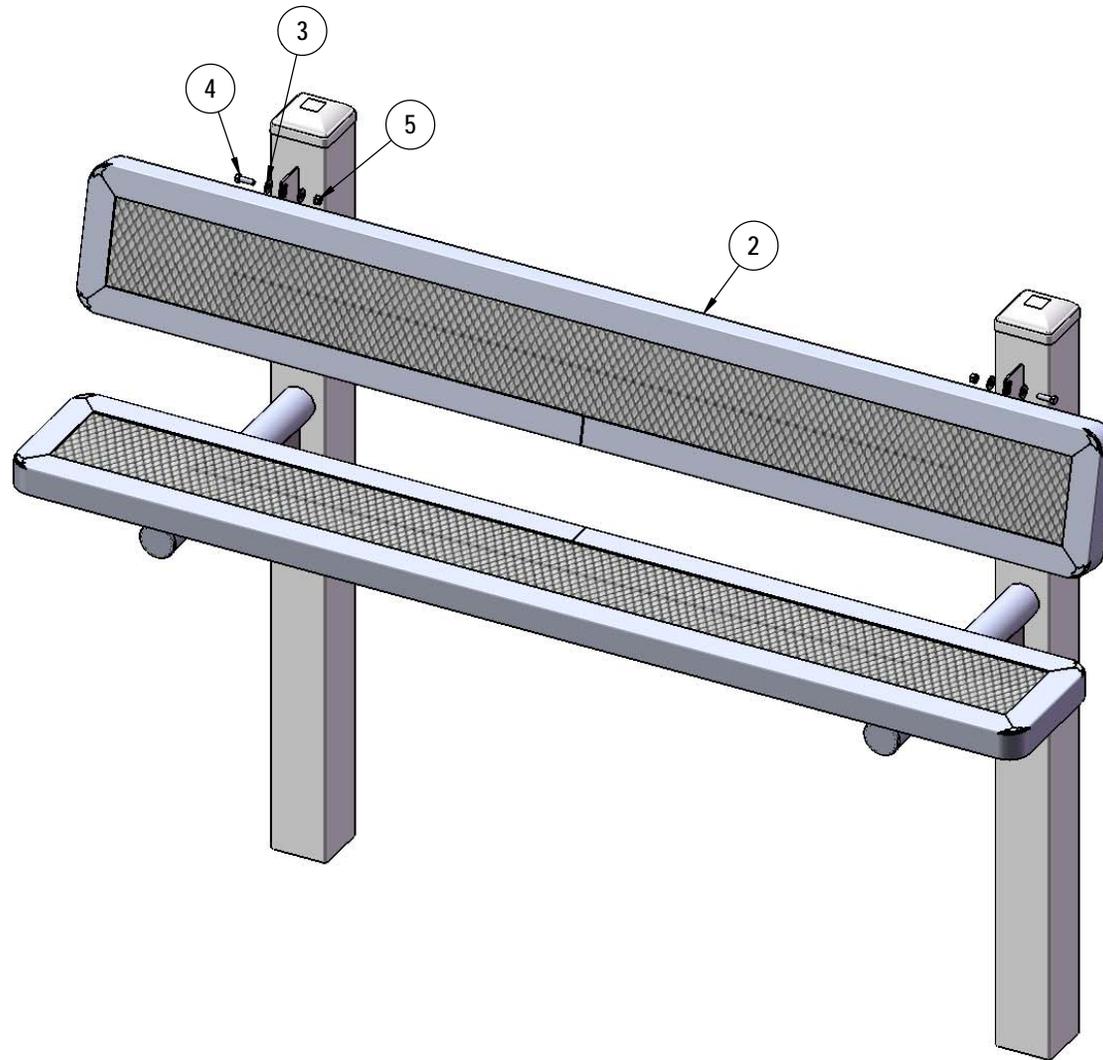

Repeat Step 1 for the back.

# FOOTINGS

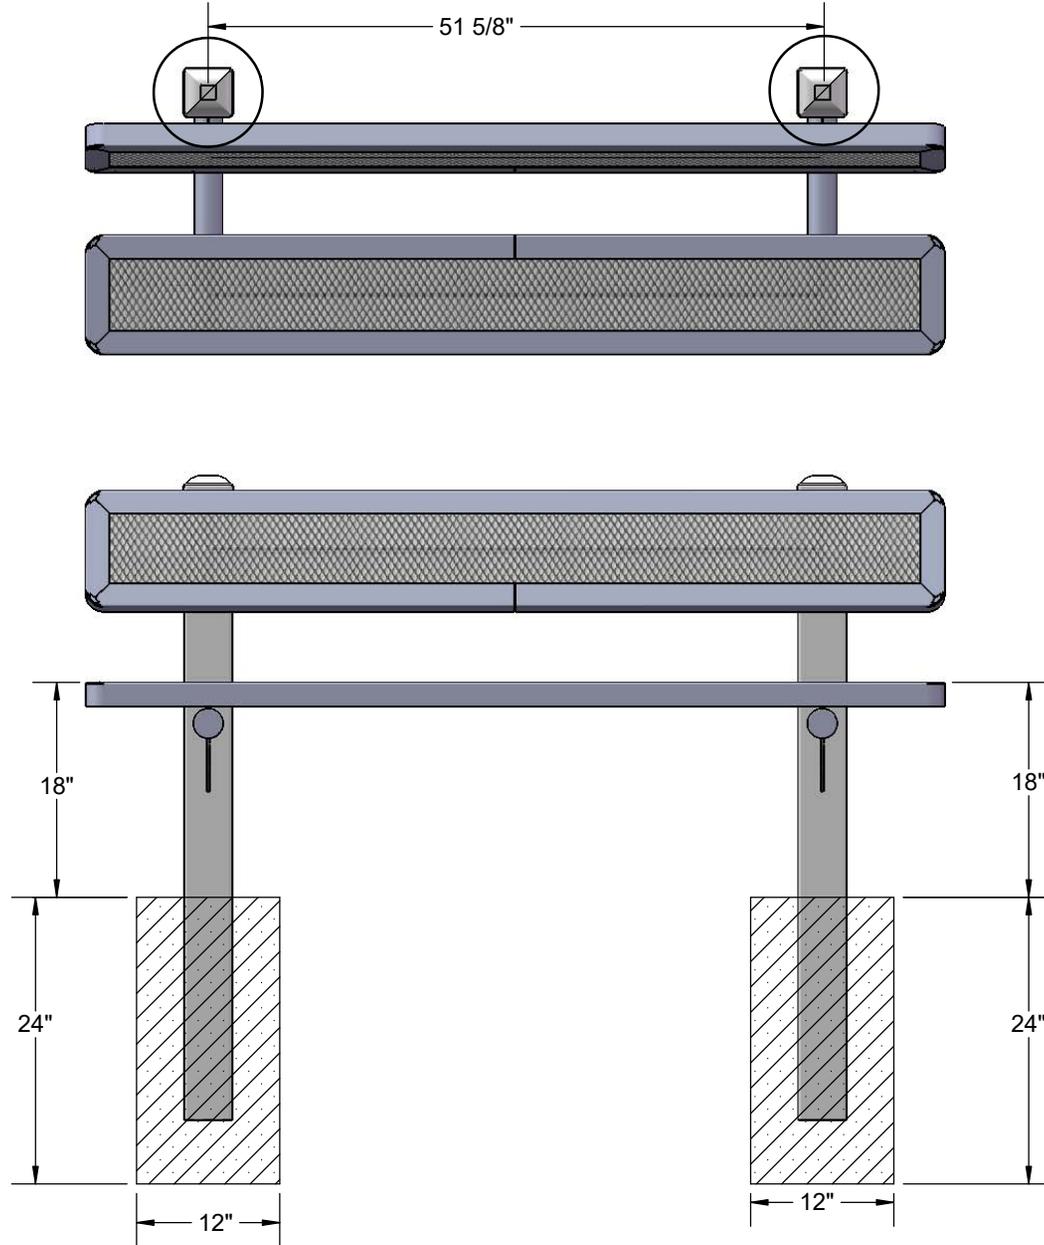

Estimated Required Concrete:  
9 - 50lb Bags of Concrete Mix

# OVERALL DIMENSIONS

