


# Site Amenities


BY SUPERIOR RECREATIONAL PRODUCTS

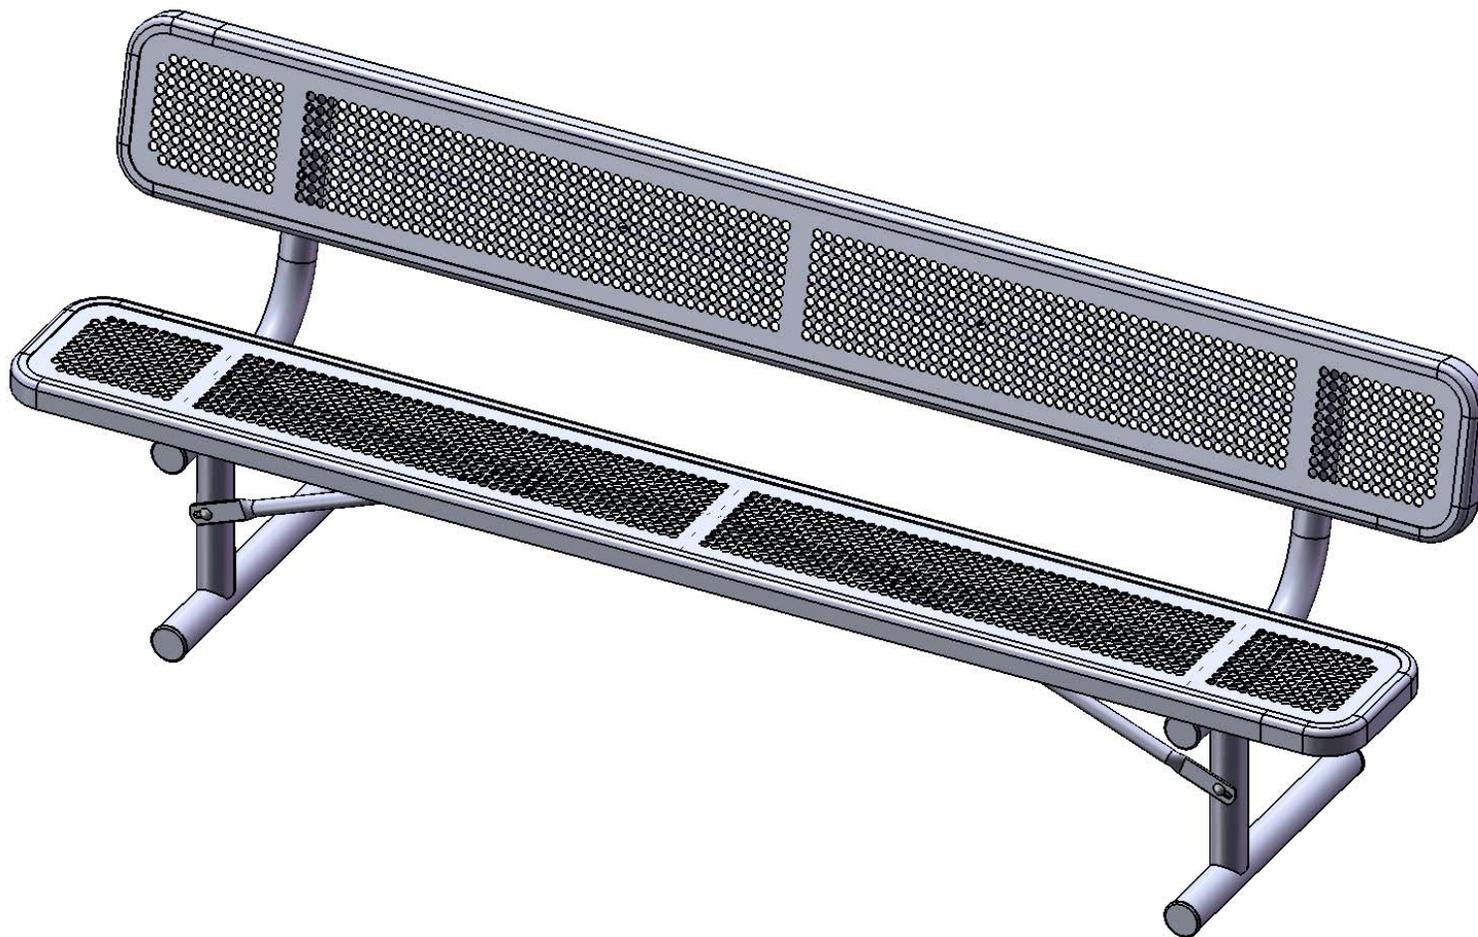


Model # B6WBINNVP

 **SUPERIOR**<sup>®</sup>  
RECREATIONAL PRODUCTS  
A **PLAYCORE** Company


# HARDWARE




5/16" x 1"  
Machine Bolt




5/16" Washer




5/16" Kep Nut

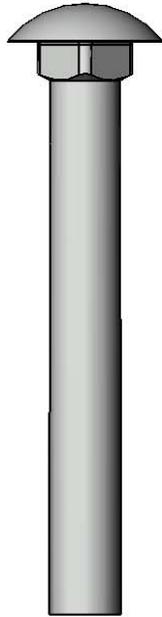

3/8" x 3"  
Carriage Bolt



3/8" Washer



3/8" Kep Nut

## PRODUCT SPECIFICATIONS

### **B8WBINNVP PORTABLE BENCH WITH BACK**

Seats & Back: 11 gauge die formed angle frame 1"x1-7/8" with 3" radius corners. Seat and back plates are fabricated from a 12ga plate. Holes are precision punched at 5/8" diameter. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Cross braces are 1" O.D. x 16 gauge pre-galvanized structural steel tubing. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.


Dimensions: 8' bench portable with back. Seats and back are 12" wide x 96" long. Seat height is 17", seat back height is 35". Total depth of seat with back is 22-1/4".

# COMPONENTS

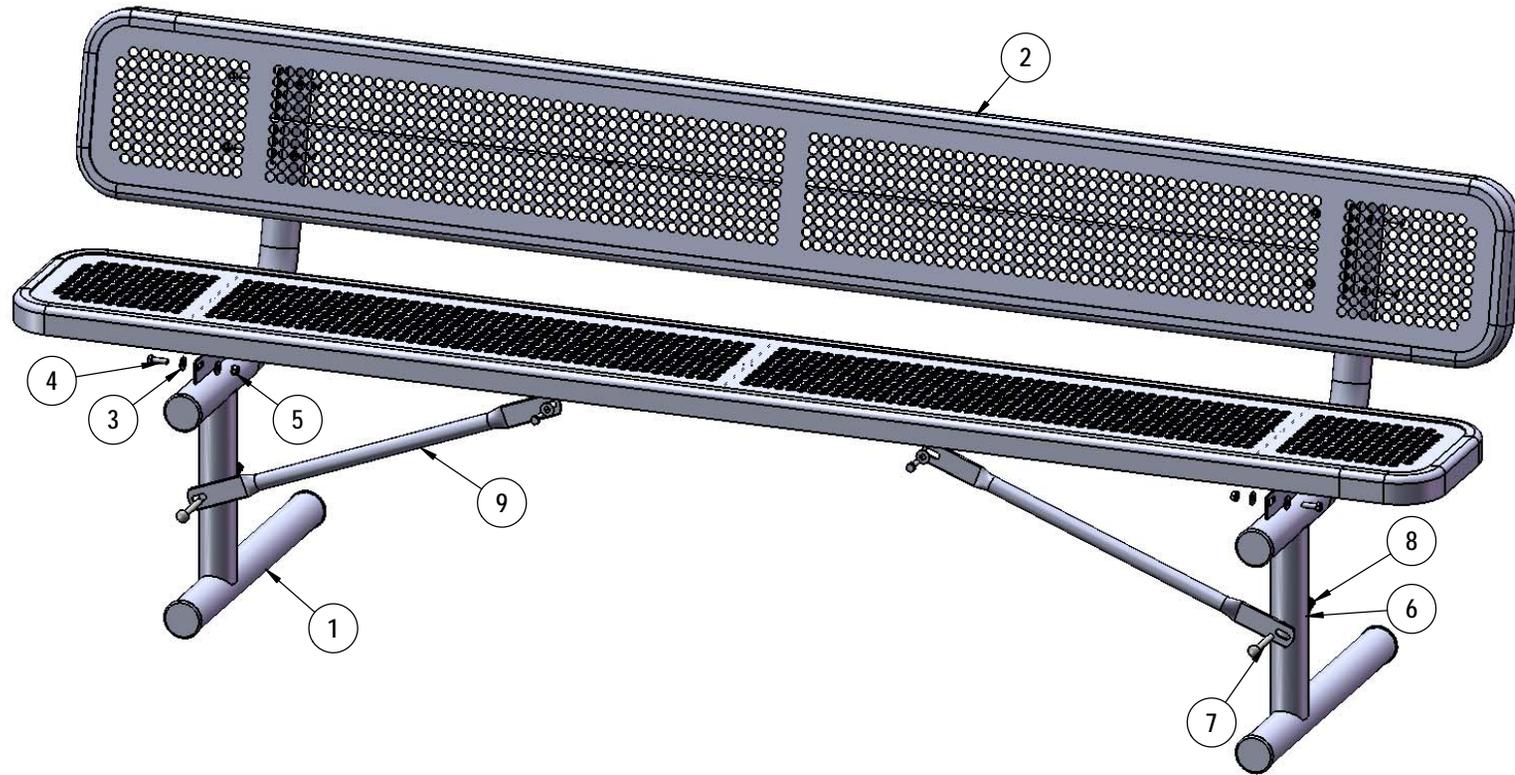


ITEM NO.	PartNo	DESCRIPTION	QTY.
1	P-V940P	940P Vinyl Leg	2
2	T-P96-S	8' Punched Seat	2
3	33-02-0007	5/16" SS Washer	20
4	33-05-0029	5/16" x 1" Machine Bolt (SS)	10
5	33-03-0012	5/16" Kep Nut (SS)	10
6	33-02-0008	3/8" Flat Washer (SS)	2
7	33-06-0058	3/8" x 3" Carriage Bolt (SS)	2
8	33-03-0013	3/8" Kep Nut (SS)	2
9	P-01-04-0129	26 3/4" Brace	2

## STEP 1

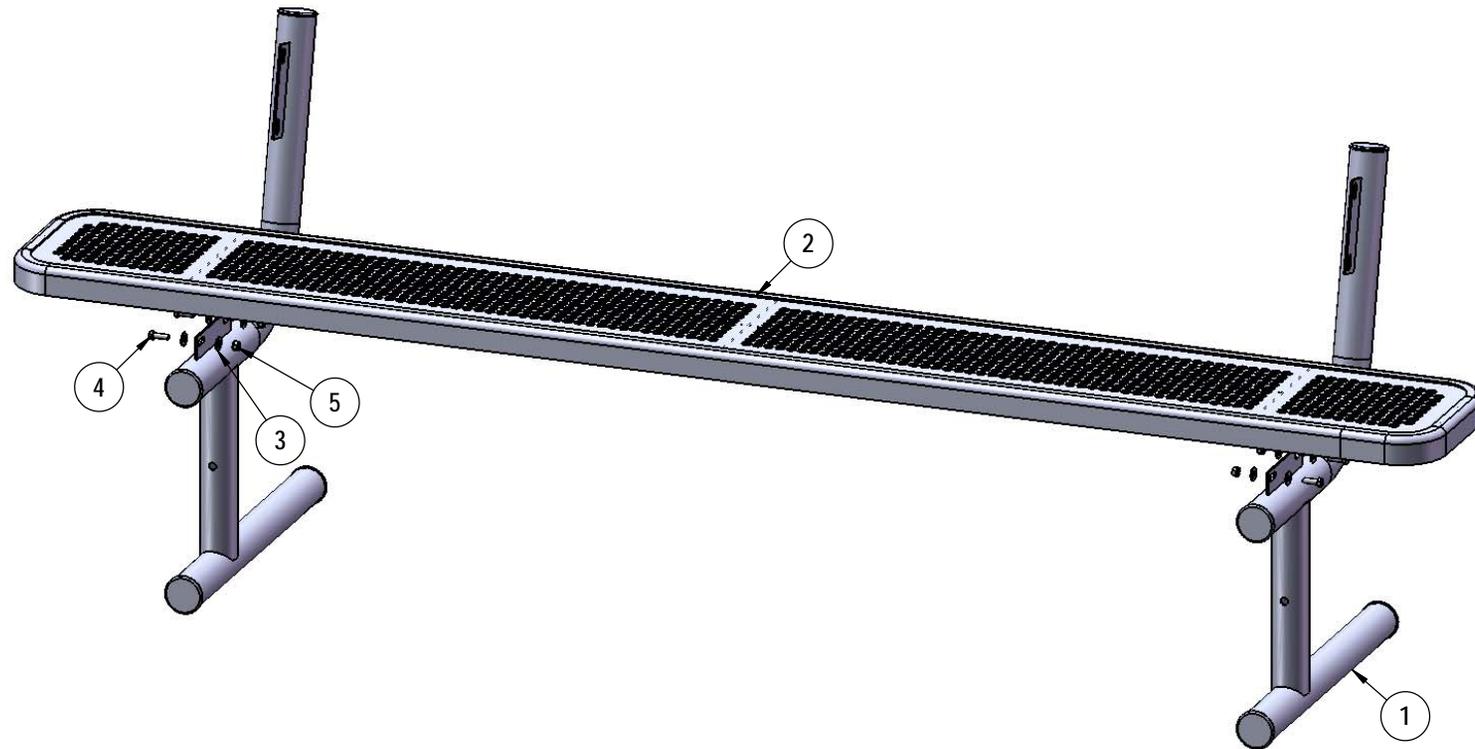


Attach the Punched Seat to the legs using specified hardware.

## STEP 2

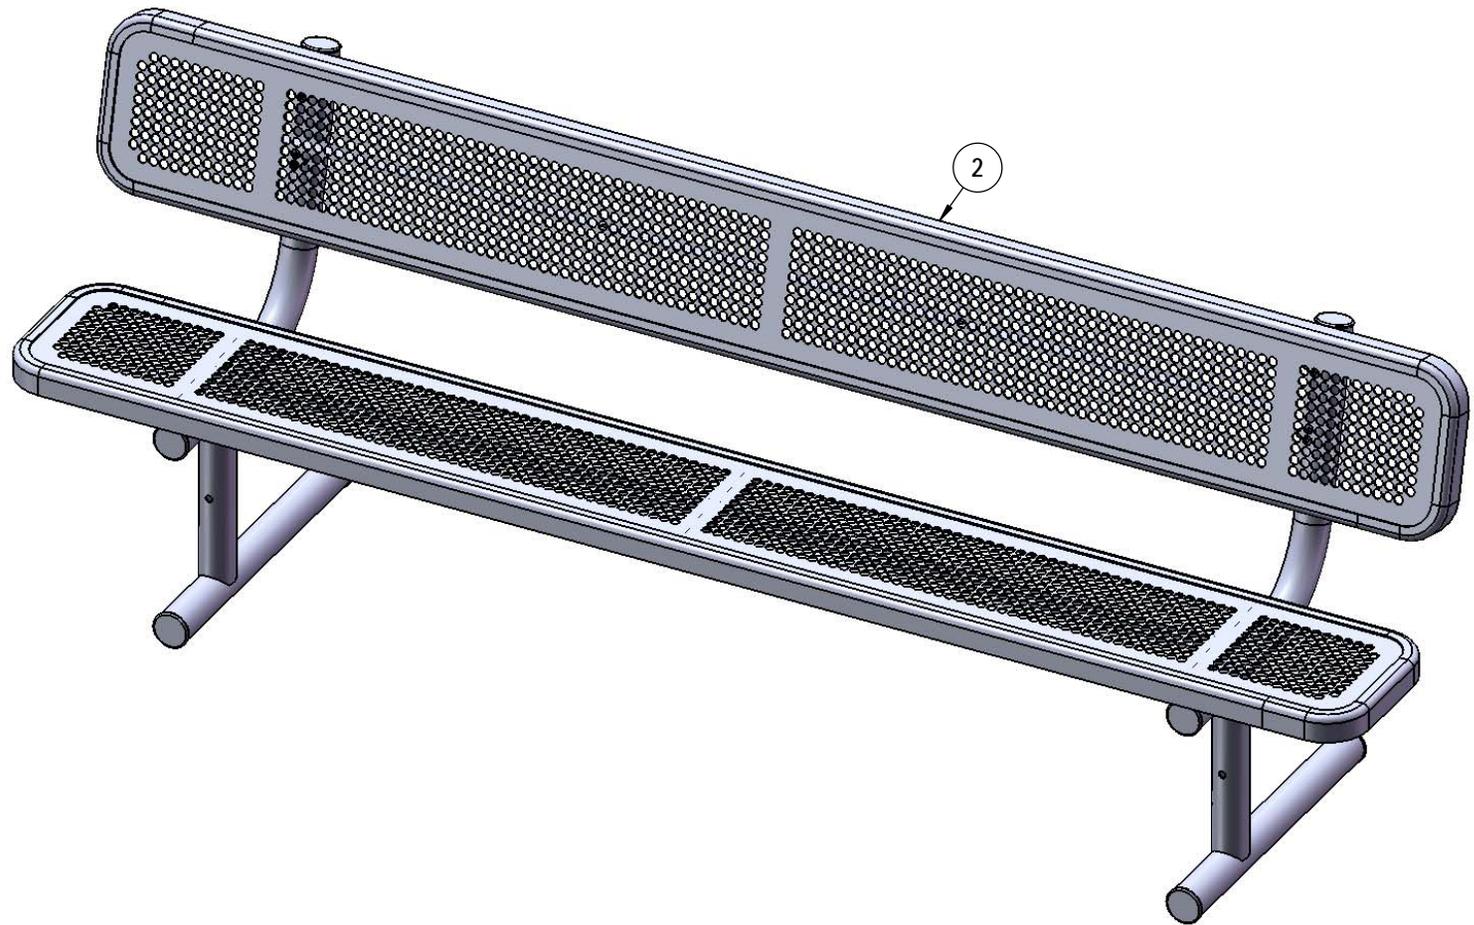

Repeat Step 1 for the back.

## STEP 3

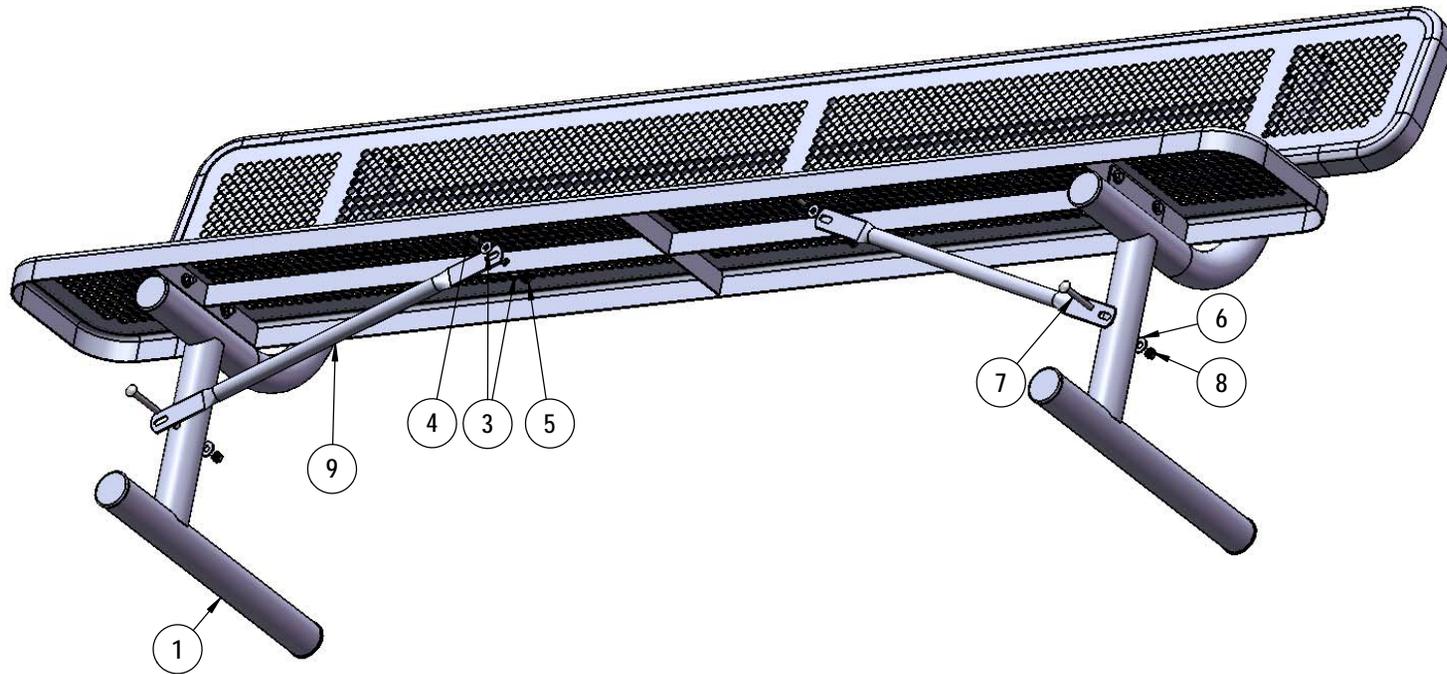

Attach the 26 3/4" Braces to the seats and legs as shown using specified hardware.

# OVERALL DIMENSIONS

